

600⁺ 切削條件表 **P338**
Cutting Condition

Square Type - Long Flute - 2 flutes

2刃長刃立銑刀

600 PLUS



HRC ▶ 45

35°

$a < b$
 $b > a$

● Micro Grain Carbide

● WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6μm

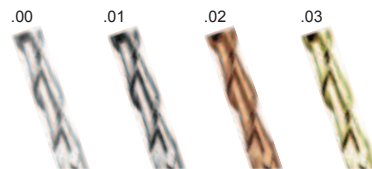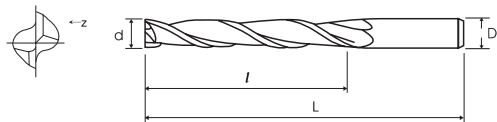

Dimension 規格					Purchase Code 採購代碼				
Diameter	Flute Length	Full Length	Shank Diameter	Flutes	MODE	Coating 塗層			
d 刃徑	l 刃長	L 全長	D 柄徑	Z 刃數	型號		ALTIBN	TISIN	ZrN-A
1	7	50	4	2	P-LET0102	.00	.01	.02	.03
1.5	9	50	4	2	P-LET0152	.00	.01	.02	.03
2	12	50	4	2	P-LET0202	.00	.01	.02	.03
2.5	12	50	4	2	P-LET0252	.00	.01	.02	.03
3	15	60	6	2	P-LET0302	.00	.01	.02	.03
3.5	15	60	6	2	P-LET0352	.00	.01	.02	.03
4	20	75	6	2	P-LET0402	.00	.01	.02	.03
4.5	20	75	6	2	P-LET0452	.00	.01	.02	.03
5	25	75	6	2	P-LET0502	.00	.01	.02	.03
5.5	25	75	6	2	P-LET0552	.00	.01	.02	.03
6	30	75	6	2	P-LET0602	.00	.01	.02	.03
7	30	100	8	2	P-LET0702	.00	.01	.02	.03
8	40	100	8	2	P-LET0802	.00	.01	.02	.03
9	40	100	10	2	P-LET0902	.00	.01	.02	.03
10	40	100	10	2	P-LET1002	.00	.01	.02	.03
11	40	100	12	2	P-LET1102	.00	.01	.02	.03
12	50	100	12	2	P-LET1202	.00	.01	.02	.03
14	50	150	16	2	P-LET1402	.00	.01	.02	.03
16	60	150	16	2	P-LET1602	.00	.01	.02	.03
20	90	200	20	2	P-LET2002	.00	.01	.02	.03

HRC ▶ 40

HRC ▶ 45

HRC ▶ 50

HRC ▶ 55

HRC ▶ 60

HRC ▶ 65



Application 適用材質：

★ Perfect 最推薦

◎ Excellent 適合

○ Good 佳

Coating 塗層	Carbon steel, Alloy steel 炭素鋼, 合金鋼	Pre-harden steel 預硬鋼	High-hardened 高硬度鋼				Stainless steel 不鏽鋼	Titanium alloy 鈦合金	Nickel/Inconel alloy 鎳基合金	Copper alloy 銅合金, 銅	Aluminum alloy 鋁合金
		~45HRC	~50HRC	~55HRC	~60HRC	~65HRC					
	○	○								○	○
ALTIBN	◎	◎	○	○			○				
TISIN	○	○	○	○							
ZrN-A	◎	◎	○	○			◎	○	○		

Unit/單位: mm